

# **SAPPHIRE 10%**

OUTSIDE VIEW | SHADING | GLARE CONTROL

Suitable for:









## **SAPPHIRE 10%**

### **FABRIC SPECIFICATION**

Sapphire is a versatile and highperformance sunscreening fabric. A range of options ensure that there is a perfect solution for every situation.

Available in 4 different openness factors, you can tailor the amount of light you let in according to the needs of each space whilst maintaining good outward views. All colours are available across each openness factor which allows you to mix different levels of shading within a building, for example on different elevations, whilst maintaining a uniform appearance.

This fabric is certified to international standards for fire retardancy and to Oeko-Tex and Greenguard standards for harmful substances and indoor air quality. It is also infused with anti-microbial protections.

This fabric is available in: 1% 3% 5% 10%

Thickness	0.50mm				
Weight	340g/m <sup>2</sup>				
Composition	30% Polyester, 70% PVC				
Widths	2.5m				
Fire retardancy	B1 DIN 4102, NFPA 701				
Care instructions	Do not soak. Clean gently by wiping with a sponge.				
Colour fastness	ISO 105: B02 GRADE 8				
Openness factor	10%				

If you need advice in specifying or have a particular query that we may be able to help with, call the Aluzion® sales office on 0845 382 2000 or email your requirements to info@aluzion.co.uk.





#### **HANDY TIP!**

Due to the nature of a screen-type fabric, a view is created through to the strongest source of light (typically from inside to outside). This means the orb of the sun will often be visible, particularly in the winter months at low sun angles. When dark outside, and lights are on inside there will also be some view through in the opposite direction. This does not mean an issue with the fabric but is due to the inherent nature of it.




#### **HANDY TIP!**

Horizontal fabric joins will be introduced where both dimensions of a blind exceed the maximum usable width of the fabric. The joins will normally be situated as near to the top of the blind as possible. Joins are visible and are either stitched or heat welded.



## **SAPPHIRE 10%** FABRIC SPECIFICATION



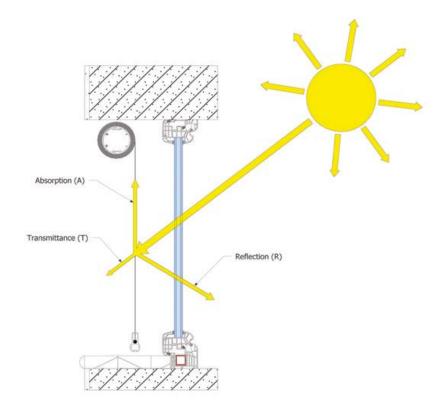

	SOLAR		OPTICAL			UV%	
	T%	R%	Α%	T%	R%	Α%	BLOCK
WHITE	23	73	4	22	-	-	88
CORNSILK	21	71	8	23	-	-	89
LINEN	15	62	23	17	-	-	91
FLAX	12	51	37	13	-	-	91
GREY/FLAX	11	46	43	12	-	-	91
GREY/WHITE	20	55	35	11	-	-	91
GREY	20	54	26	19	-	-	91
CHARCOAL/GREY	9	13	78	10	-	-	90
BRONZE	10	9	81	11	-	-	91
BLACK	7	5	88	9	-	-	90



Aluzion\* reserve the right to change colours without notice as colours may become obsolete, discontinued or only compatible with particular blind systems.

If in doubt, please request stock cuttings of fabrics before production.

Please note that colours viewed on screen will appear different to the actual product.